MP MASTER
MA29871

SCIENTIFIC-ATLANTA, INC.
2162 PIEDMONT ROAD, N.E., ATLANTA 9, GEORGIA • Tel. TRinity 5-7291 • FAX GVV, TWX AT 335

INSTRUCTION MANUAL
POSITIONER CONTROL UNIT
MODEL PC 2-6R
SERIAL NO. _____

November 16, 1959

POSITIONER CONTROL UNIT

PC 2-6R

The Scientific-Atlanta Model Pc 2-6R consists basically of a General Radio Type 1701-AK (1/15 HP) Variac Motor Speed Control. The motor speed control unit provides suitable armature and field voltages to excite an external standard shunt wound motor. The armature voltage is adjustable from rated value to zero by means of a VARIAC. The field voltage may be switched to either of two values allowing a maximum speed of 1725 or 3450 rpm. On the high speed range, field excitation is reduced with corresponding reduction in maximum torque. Reversing the armature voltage polarity provides reverse rotation of the motor.

AC is available on pins A and B of J-3 for use by a Scientific-Atlanta, Inc. Series PI 2 Positioner Indicator assembly. The ac is fused in the Positioner Indicator assembly and provides ac excitation for the indicator synchro receivers and for external synchro transmitter units.

Specifications for the Positioner Control Unit are:

Motor Horsepower Rating	1/15 HP maximum
Output Power (dc)	
Armature Voltage	0-115 V
Armature Current	0.8 A maximum continuous
Field Voltage	115 V or 45 V
Field Current	0.2 A maximum
Physical Description	panel mounting, 5 1/4 X 19 X 11 pounds net weight
Input Power (ac)	115 V, 50 cycles 125 watts
Auxiliary Output	115 V, 50-60 cps on type AN connector to Series PI 2 or PI 3 Positioner Indicator Units.

Digitized by the Internet Archive
in 2026

https://archive.org/details/manualsplus_13580

PARTS LIST

PC 2-6R Positioner Control Unit

Component Designation	Description	Mfr.	Mfr. Part No.
DS-1	Pilot Light, 6.3 VAC	Mazda	#44
F-1	Fuse, Armature	Mazda	0.8 amperes
F-2	Fuse, Field	Mazda	0.2 amperes
J-1	Connector	Amphenol	97-3102A-14S-2S
J-3	Connector	Amphenol	97-3102A-18-8S
L-1	Choke	General Radio	745-409
P-2	Connector	Hubbell	7486
RX-1	Rectifiers, 6 plate 250 ma	General Radio	2RE-6
RX-2	Rectifiers, 6 plate 250 ma	General Radio	2RE-6
RX-3	Rectifiers, 6 plate 250 ma	General Radio	2RE-6
RX-4	Rectifiers, 6 plate 250 ma	General Radio	2RE-6
RX-5	Rectifier, Diode, 100 ma	Audio Devices	50 E5
RX-6	Rectifier, Diode, 100 ma	Audio Devices	50 E5
RX-7	Rectifier, Diode, 100 ma	Audio Devices	50 E5
RX-8	Rectifier, Diode, 100 ma	Audio Devices	50 E5
S-1	Switch DPST	General Radio	SWT 333
S-2	Switch DPDT	General Radio	SWT 335
S-3	Switch SPDT	General Radio	SWT 320
T-1	Variac	General Radio	200-402

NOTES:

1. The armature fuse will blow at dc outputs between 0.9 and 1.15 amperes, giving protection on starting and against severe overloads. In continuous duty service, the armature current should be checked with a meter to make certain that the 0.8 a. limit is not exceeded.
2. On the high speed range, 0 - 3450 rmp, field excitation is reduced with corresponding reduction in maximum torque. The armature current for a given load is doubled for this range. Do not overload.
3. Maximum continuous output ratings: Armature 0.8 ampere
   Field 0.2 ampere

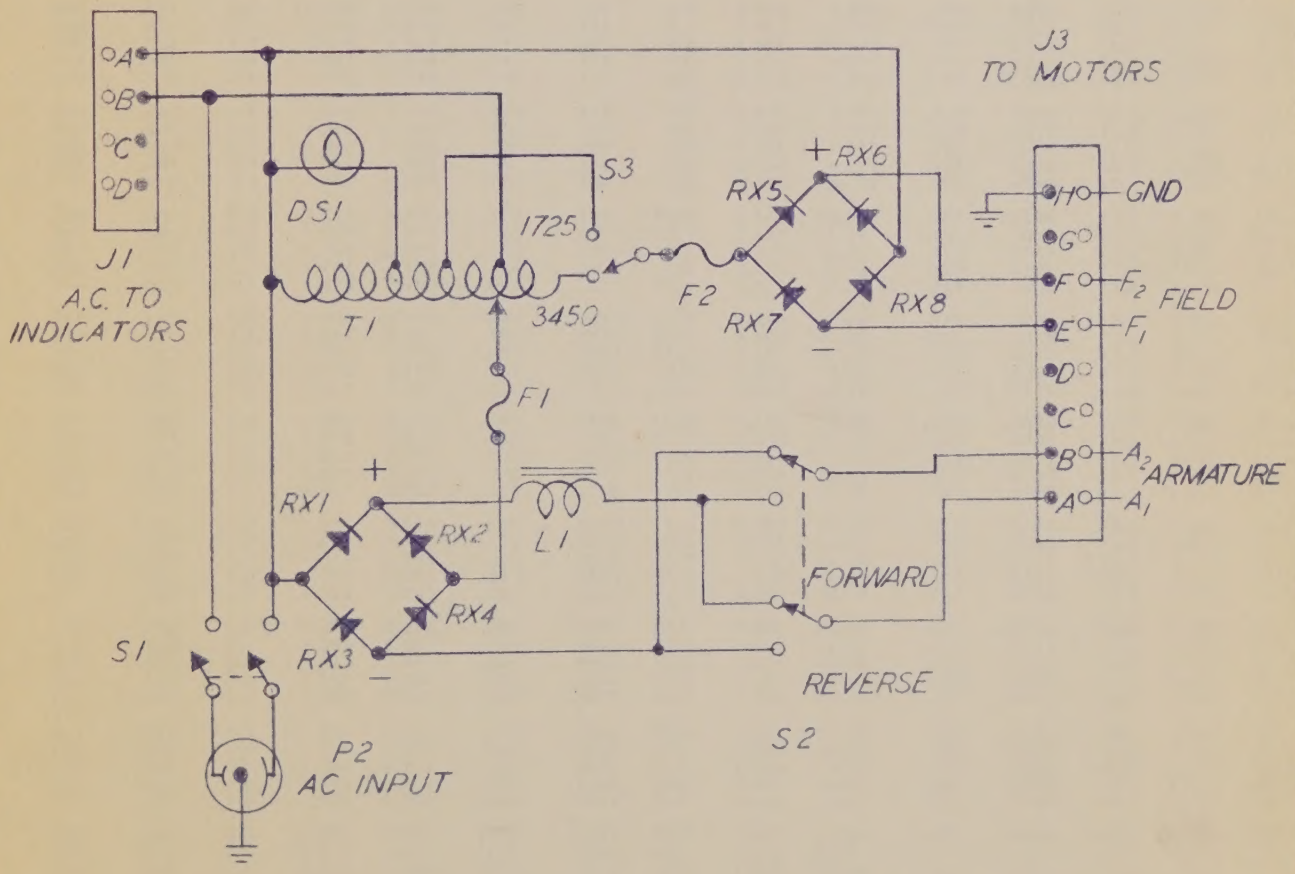

POSITIONER CONTROL UNIT
Model PC 2-6R
Schematic Diagram

CONVERSION OF VOLTAGE AND POWER RATIOS TO DECIBELS

The basic chart below indicates the number of decibels (db) corresponding to the listed ratios of voltage or power over the range of −20 to +20 db. For voltage or power ratios greater than those included in the chart, the ratio can be broken down into a product of two numbers, the value in db for each found separately, and the two results added. Example: To convert a power ratio of 2,000:1 to db, express 2,000 as 2×10^3; the number of db corresponding to a power ratio of 2 is very nearly 3, and the number of db for a power ratio of 10^3 is 30. Therefore, the power ratio of 2,000:1 is approximately 30 db + 3 db = 33 db. In the lower right-hand corner of the chart db values for voltage and power ratios of integral powers of 10 are given.

Voltage Ratio	*Power Ratio*	*−db+*	*Voltage Ratio*	*Power Ratio*	*Voltage Ratio*	*Power Ratio*	*−db+*	*Voltage Ratio*	*Power Ratio*	*Voltage Ratio*	*Power Ratio*	*−db+*	*Voltage Ratio*	*Power Ratio*
1.000	**1.000**	**0**	**1.000**	**1.000**	**.447**	**.200**	**7.0**	**2.239**	**5.012**	**.200**	**.0398**	**14.0**	**5.012**	**25.12**
.989	.977	.1	1.012	1.023	.442	.195	7.1	2.265	5.129	.197	.0389	14.1	5.070	25.70
.977	.955	.2	1.023	1.047	.437	.191	7.2	2.291	5.248	.195	.0380	14.2	5.129	26.30
.966	.933	.3	1.035	1.072	.432	.186	7.3	2.317	5.370	.193	.0372	14.3	5.188	26.92
.955	.912	.4	1.047	1.096	.427	.182	7.4	2.344	5.495	.191	.0363	14.4	5.248	27.54
.944	.891	.5	1.059	1.122	.422	.178	7.5	2.371	5.623	.188	.0355	14.5	5.309	28.18
.933	.871	.6	1.072	1.148	.417	.174	7.6	2.399	5.754	.186	.0347	14.6	5.370	28.84
.923	.851	.7	1.084	1.175	.412	.170	7.7	2.427	5.888	.184	.0339	14.7	5.433	29.51
.912	.832	.8	1.096	1.202	.407	.166	7.8	2.455	6.026	.182	.0331	14.8	5.495	30.20
.902	.813	.9	1.109	1.230	.403	.162	7.9	2.483	6.166	.180	.0324	14.9	5.559	30.90
.891	**.794**	**1.0**	**1.122**	**1.259**	**.398**	**.159**	**8.0**	**2.512**	**6.310**	**.178**	**.0316**	**15.0**	**5.623**	**31.62**
.881	.776	1.1	1.135	1.288	.394	.155	8.1	2.541	6.457	.176	.0309	15.1	5.689	32.36
.8 1	.759	1.2	1.148	1.318	.389	.151	8.2	2.570	6.607	.174	.0302	15.2	5.754	33.11
.861	.741	1.3	1.161	1.349	.385	.148	8.3	2.600	6.761	.172	.0295	15.3	5.821	33.88
.851	.724	1.4	1.175	1.380	.380	.145	8.4	2.630	6.918	.170	.0288	15.4	5.888	34.67
.841	.708	1.5	1.189	1.413	.376	.141	8.5	2.661	7.079	.168	.0282	15.5	5.957	35.48
.832	.692	1.6	1.202	1.445	.372	.138	8.6	2.692	7.244	.166	.0275	15.6	6.026	36.31
.822	.676	1.7	1.216	1.479	.367	.135	8.7	2.723	7.413	.164	.0269	15.7	6.095	37.15
.813	.661	1.8	1.230	1.514	.363	.132	8.8	2.754	7.586	.162	.0263	15.8	6.166	38.02
.804	.646	1.9	1.245	1.549	.359	.129	8.9	2.786	7.762	.160	.0257	15.9	6.237	38.90
.794	**.631**	**2.0**	**1.259**	**1.585**	**.355**	**.126**	**9.0**	**2.818**	**7.943**	**.159**	**.0251**	**16.0**	**6.310**	**39.81**
.785	.617	2.1	1.274	1.622	.351	.123	9.1	2.851	8.128	.157	.0246	16.1	6.383	40.74
.776	.603	2.2	1.288	1.660	.347	.120	9.2	2.884	8.318	.155	.0240	16.2	6.457	41.69
.767	.589	2.3	1.303	1.698	.343	.118	9.3	2.917	8.511	.153	.0234	16.3	6.531	42.66
.759	.575	2.4	1.318	1.738	.339	.115	9.4	2.951	8.710	.151	.0229	16.4	6.607	43.65
.750	.562	2.5	1.334	1.778	.335	.112	9.5	2.985	8.913	.150	.0224	16.5	6.683	44.67
.741	.550	2.6	1.349	1.820	.331	.110	9.6	3.020	9.120	.148	.0219	16.6	6.761	45.71
.733	.537	2.7	1.365	1.862	.327	.107	9.7	3.055	9.333	.146	.0214	16.7	6.839	46.77
.724	.525	2.8	1.380	1.905	.324	.105	9.8	3.090	9.550	.145	.0209	16.8	6.918	47.86
.716	.513	2.9	1.396	1.950	.320	.102	9.9	3.126	9.772	.143	.0204	16.9	6.998	48.98
.708	**.501**	**3.0**	**1.413**	**1.995**	**.316**	**.100**	**10.0**	**3.162**	**10.000**	**.141**	**.0200**	**17.0**	**7.079**	**50.12**
.700	.490	3.1	1.429	2.042	.313	.0977	10.1	3.199	10.23	.140	.0195	17.1	7.161	51.29
.692	.479	3.2	1.445	2.089	.309	.0955	10.2	3.236	10.47	.138	.0191	17.2	7.244	52.48
.684	.468	3.3	1.462	2.138	.306	.0933	10.3	3.273	10.72	.137	.0186	17.3	7.328	53.70
.676	.457	3.4	1.479	2.188	.302	.0912	10.4	3.311	10.96	.135	.0182	17.4	7.413	54.95
.668	.447	3.5	1.496	2.239	.299	.0891	10.5	3.350	11.22	.133	.0178	17.5	7.499	56.23
.661	.437	3.6	1.514	2.291	.295	.0871	10.6	3.388	11.48	.132	.0174	17.6	7.586	57.54
.653	.427	3.7	1.531	2.344	.292	.0851	10.7	3.428	11.75	.130	.0170	17.7	7.674	58.88
.646	.417	3.8	1.549	2.399	.288	.0832	10.8	3.467	12.02	.129	.0166	17.8	7.762	60.26
.638	.407	3.9	1.567	2.455	.285	.0813	10.9	3.508	12.30	.127	.0162	17.9	7.852	61.66
.631	**.398**	**4.0**	**1.585**	**2.512**	**.282**	**.0794**	**11.0**	**3.548**	**12.59**	**.126**	**.0159**	**18.0**	**7.943**	**63.10**
.624	.389	4.1	1.603	2.570	.279	.0776	11.1	3.589	12.88	.125	.0155	18.1	8.035	64.57
.617	.380	4.2	1.622	2.630	.275	.0759	11.2	3.631	13.18	.123	.0151	18.2	8.128	66.07
.610	.372	4.3	1.641	2.692	.272	.0741	11.3	3.673	13.49	.122	.0148	18.3	8.222	67.61
.603	.363	4.4	1.660	2.754	.269	.0724	11.4	3.715	13.80	.120	.0145	18.4	8.318	69.18
.596	.355	4.5	1.679	2.818	.266	.0708	11.5	3.758	14.13	.119	.0141	18.5	8.414	70.79
.589	.347	4.6	1.698	2.884	.263	.0692	11.6	3.802	14.45	.118	.0138	18.6	8.511	72.44
.582	.339	4.7	1.718	2.951	.260	.0676	11.7	3.846	14.79	.116	.0135	18.7	8.610	74.13
.575	.331	4.8	1.738	3.020	.257	.0661	11.8	3.890	15.14	.115	.0132	18.8	8.710	75.86
.569	.324	4.9	1.758	3.090	.254	.0646	11.9	3.936	15.49	.114	.0129	18.9	8.811	77.62
.562	**.316**	**5.0**	**1.778**	**3.162**	**.251**	**.0631**	**12.0**	**3.981**	**15.85**	**.112**	**.0126**	**19.0**	**8.913**	**79.43**
.556	.309	5.1	1.799	3.236	.248	.0617	12.1	4.027	16.22	.111	.0123	19.1	9.016	81.28
.550	.302	5.2	1.820	3.311	.246	.0603	12.2	4.074	16.60	.110	.0120	19.2	9.120	83.18
.543	.295	5.3	1.841	3.388	.243	.0589	12.3	4.121	16.98	.108	.0118	19.3	9.226	85.11
.537	.288	5.4	1.862	3.467	.240	.0575	12.4	4.169	17.38	.107	.0115	19.4	9.333	87.10
.531	.282	5.5	1.884	3.548	.237	.0562	12.5	4.217	17.78	.106	.0112	19.5	9.441	89.13
.525	.275	5.6	1.905	3.631	.234	.0550	12.6	4.266	18.20	.105	.0110	19.6	9.550	91.20
.519	.269	5.7	1.928	3.715	.232	.0537	12.7	4.315	18.62	.104	.0107	19.7	9.661	93.33
.513	.263	5.8	1.950	3.802	.229	.0525	12.8	4.365	19.05	.102	.0105	19.8	9.772	95.50
.507	.257	5.9	1.972	3.890	.227	.0513	12.9	4.416	19.50	.101	.0102	19.9	9.886	97.72
.501	**.251**	**6.0**	**1.995**	**3.981**	**.224**	**.0501**	**13.0**	**4.467**	**19.95**	**.100**	**.0100**	**20.0**	**10.000**	**100.00**
.496	.246	6.1	2.018	4.074	.221	.0490	13.1	4.519	20.42		10^{-3}	30		10^3
.490	.240	6.2	2.042	4.169	.219	.0479	13.2	4.571	20.89	10^{-2}	10^{-4}	40	10^2	10^4
.484	.234	6.3	2.065	4.266	.216	.0468	13.3	4.624	21.38					
.479	.229	6.4	2.089	4.365	.214	.0457	13.4	4.677	21.88		10^{-5}	50		10^5
.473	.224	6.5	2.113	4.467	.211	.0447	13.5	4.732	22.39	10^{-3}	10^{-6}	60	10^3	10^6
.468	.219	6.6	2.138	4.571	.209	.0437	13.6	4.786	22.91		10^{-7}	70		10^7
.462	.214	6.7	2.163	4.677	.207	.0427	13.7	4.842	23.44	10^{-4}	10^{-8}	80	10^4	10^8
.457	.209	6.8	2.188	4.786	.204	.0417	13.8	4.898	23.99		10^{-9}	90		10^9
.452	.204	6.9	2.213	4.898	.202	.0407	13.9	4.955	24.55	10^{-5}	10^{-10}	100	10^5	10^{10}
											10^{-11}	110		10^{11}
										10^{-6}	10^{-12}	120	10^6	10^{12}

SCIENTIFIC-ATLANTA, INC.

2162 PIEDMONT RD., N. E. • ATLANTA 9, GA.

MP MASTER
MA29871